

HHA1 Model Number Builder


High Power Amplifier

Frequency Band ¹

U1 = 340.0-399.9 MHz
43 = 433.0-434.8 MHz
86 = 868.0-870.0 MHz
91 = 902.0-928.0 MHz
L1 = 1435-1535 MHz
L2 = 1700-1850 MHz
S1 = 2200-2399 MHz
S2 = 2400-2499 MHz
S3 = 2200-2499 MHz
C1 = 4400-4900 MHz
C2 = 4900-4999 MHz
C3 = 4400-4999 MHz
ZZ = Custom ²

RF Power (Choose 1 to 3 Options)

T = Include 10.0 W
0 = Do Not Include 10.0 W
5 = Include 5.0 W
0 = Do Not Include 5.0 W
2 = Include 2.0 W
0 = Do Not Include 2.0 W

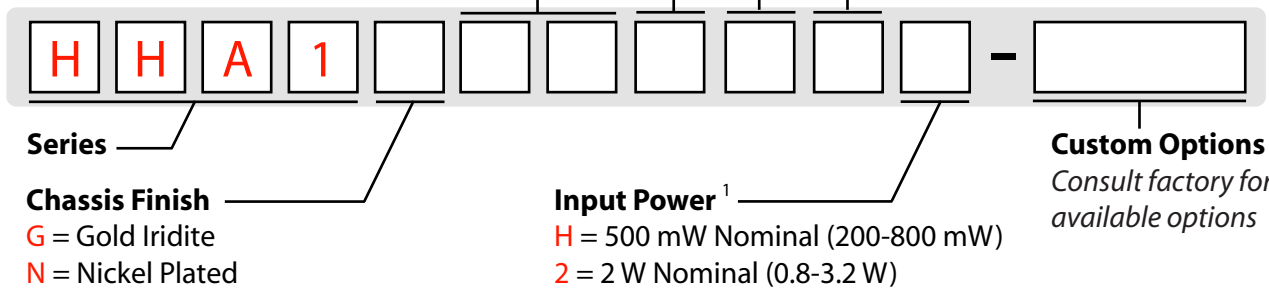

Notes:

1) HHA1 power amplifiers must be matched to the connected transmitters



Advanced Microwave Products
 8748 Technology Way
 Reno, NV 89521

Phone: (775) 345-9933
 Fax: (775) 345-9913
 E-mail: sales@advmw.com
 Web: www.advmw.com